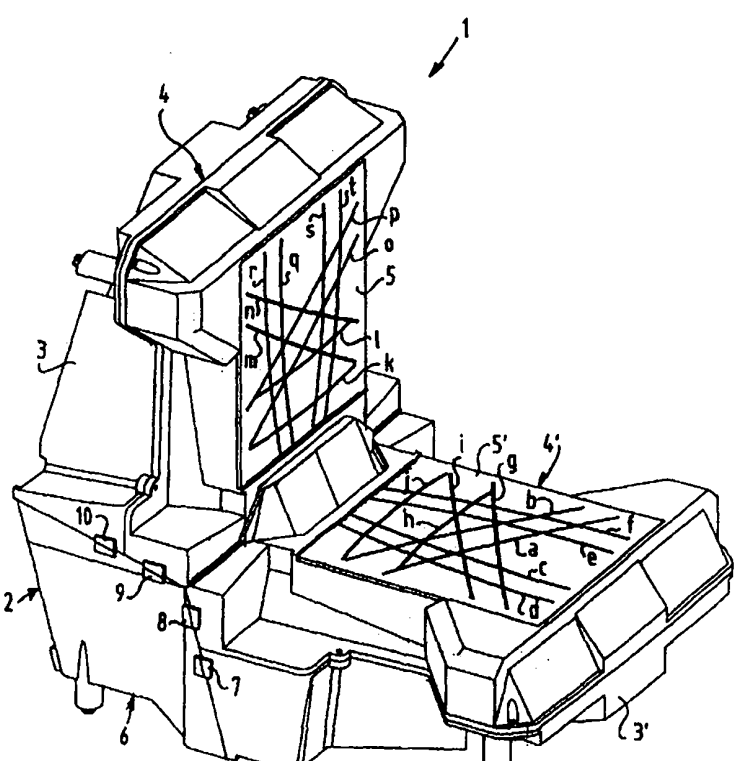


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: G06K 7/10	A2	(11) International Publication Number: WO 99/01839 (43) International Publication Date: 14 January 1999 (14.01.99)
(21) International Application Number: PCT/NL98/00366 (22) International Filing Date: 25 June 1998 (25.06.98) (30) Priority Data: 1006454 2 July 1997 (02.07.97) NL (71) Applicant (for all designated States except US): SCANTECH B.V. [NL/NL]; Uraniumweg 23, NL-3812 RJ Amersfoort (NL). (72) Inventors; and (75) Inventors/Applicants (for US only): NUNNINK, Laurentius, Wilhelmus [NL/NL]; Het Ruim 15, NL-3823 SG Amersfoort (NL). SCHONENBERG, Cornelis, Reinier, Johannes [NL/NL]; Wilhelmina Druckerstraat 9, NL-2135 HH Hoofddorp (NL). (74) Agent: LAND, Addick, Adrianus, Gosling; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>In English translation (filed in Dutch). Without international search report and to be republished upon receipt of that report.</i>
(54) Title: METHOD AND DEVICE FOR READING OF A BARCODE ON AN ARTICLE (57) Abstract <p>The present invention comprises a device for reading a code on an article, comprising: a housing provided with at least two windows for passage of radiation which are disposed at a relative mutual angle; radiation source means for transmitting radiation to the article, which radiation source means are arranged in the housing and comprise at least two separate radiation sources; a rotatable polygonal mirror for reflecting radiation coming from the radiation source means; a number of fixedly disposed mirrors for reflecting through the respective windows the radiation coming from the polygonal mirror; and detection means for detecting the radiation scattered by the code.</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND DEVICE FOR READING OF A BARCODE ON AN ARTICLE

The present invention relates to a device and method ergonomically suitable for users for reading a code, such as a bar code, on, or scanning of, an article, wherein radiation is projected onto the article from two sides, thereby preventing the person holding the article from having to turn it with awkward wrist movements.

Such devices are per se known, and the present invention has for its object to improve this invention, particularly in the sense that interruption of the reading process at the end of the lifespan of the laser is precluded and/or further possibilities are created by making wavelengths and/or focus points of both radiation sources mutually different.

The present invention comprises a device for reading a code on an article, comprising:

- a housing provided with at least two windows for passage of radiation which are disposed at a relative mutual angle;
- radiation source means for transmitting radiation to the article, which radiation source means are arranged in the housing and comprise at least two separate radiation sources;
- a rotatable polygonal mirror for reflecting radiation coming from the radiation source means;
- a number of fixedly disposed mirrors for reflecting through the respective windows the radiation coming from the polygonal mirror; and
- detection means for detecting the radiation scattered by the code.

In the preferred embodiment wherein the radiation sources each transmit radiation of a different

wavelength, it is possible in the case that one of the two wavelengths has difficulty in distinguishing the bar code from the background that the code can still be recognized using other wavelengths.

5 As a result of the preferred embodiment wherein each of the radiation sources is focussed at a different distance relative to the window, the area within which bar codes can be effectively scanned is enlarged.

10 The present invention further provides a method wherein the device according to the present invention is applied.

15 In each of the two above stated preferred embodiments the scanning potential is increased, whereby the movement of the article during the scanning movement by for instance a check-out operator requires the least possible adjustment, whereby the ergonomics are improved further.

20 In a further preferred embodiment the radiation sources each have a different polarization direction. In many cases the material of the bar code is sensitive to the polarization of the incident laser light such that a stronger reflection is obtained for one of the two radiation sources. It is then possible to take into account in the microprocessor for which polarization direction the best score of bar code recognition is obtained so that this can be switched ON more often than the other radiation source.

25 As much use as possible is preferably made of symmetrical scan patterns since, from a statistical viewpoint, there is no preference for the direction of the bar code. The scan lines are projected alternately whenever possible through each of the two windows. This further enables the use of the same components for a horizontal and a vertical window with fixed mirrors. It is however possible to suffice with a single polygonal mirror and sensor with associated analog electronics.

35 Finally, the present invention provides a number of co-acting devices according to the present

invention, whereby a passage is obtained for scanning articles on all sides, for instance articles supplied on a conveyor.

Further advantages, features and details of the present invention will be elucidated on the basis of the following description of preferred embodiments thereof with reference to the annexed drawing, in which:

fig. 1 shows a view in perspective of a preferred embodiment of a device according to the present invention;

fig. 2 shows a schematic view in perspective of a device of fig. 1;

fig. 3A, 3B show respectively a top view and a view in cross-section of the device shown in fig. 1 and 2 to illustrate a first scan line;

fig. 4A, 4B show respectively a top view and a view in cross-section of the device shown in fig. 1 and 2 to illustrate a second scan line;

fig. 5A, 5B show respectively a top view and a view in cross-section of the device shown in fig. 1 and 2 to illustrate a third scan line;

fig. 6A, 6B show respectively a top view and a view in cross-section of the device shown in fig. 1 and 2 to illustrate a fourth scan line;

fig. 7A, 7B show respectively a top view and a view in cross-section of the device shown in fig. 1 and 2 to illustrate a fifth scan line;

fig. 8 is a view in perspective of detail VIII in fig. 2;

fig. 9 is a schematic view in perspective of four devices according to the present invention wherein a tunnel is formed for scanning of an article on all sides; and

fig. 10 shows a diagram of a preferred embodiment of the device according to the present invention;

fig. 11A, 11B and 11C show signals in the arrangement of fig. 10; and

fig. 12 is a view elucidating the increase in the scanning area in a preferred embodiment of the device according to the present invention.

A device 1 (fig. 1) comprises a housing which
5 is preferably constructed from identically shaped injection moulded components 3, 4 respectively 3', 4', wherein in components 4, 4' are arranged windows 5, 5' for passage of scanning scan lines a, b, c, d, e, f, g, h, i, j, k, l, m, n, o, p, q, r, s respectively t.
10 The moving parts and the electronic components are arranged as far as possible in a corner part 6 of the housing. For rapid assembly, in addition to several screw connections between the parts 3, 3' respectively 4, 4' and the corner part 8, slide elements 7, 8, 9, 10 are
15 arranged for quick sliding together of the different components. Assembly is speeded up by omitting screw connections; the slide elements can likewise be injection moulded.

As can be seen particularly in fig. 2, a number
20 of fixedly disposed mirrors 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 33, 34, 35, 36, 37, 38 are situated in the interior of housing 1. Further arranged in corner part 6 are two laser sources 41 respectively 42, the radiation of which is projected onto a fixed mirror 45
25 via further fixed mirrors 43, 44 (to the greatest possible extent reflective for the one laser and transparent for the other). The optical axes of both laser sources thus coincide as much as possible. The radiation from source 41 is projected via fixed mirrors
30 46, 47 and 44 onto mirror 45. The radiation from both laser beams is projected onto the rotating mirror 50 which, depending on the position of the side surfaces thereof, projects radiation onto the fixed mirrors 21-28 or onto the fixed mirrors 30-38.

35 The radiation scattered by the bar code on the article (not shown) reaches detector 53 via the same optical paths via focussing mirror 51 and fixed mirror 52.

In the present preferred embodiment the radiation from laser source 41 has a wavelength of about 820 nm, while the wavelength of the laser light from laser source 42 amounts to about 670 nm. The focus points
5 preferably also differ mutually, for instance with a difference of about 7 cm, so that the area of maximum detection of bar codes differs slightly for each of the two laser beams.

The different wavelength is of particular
10 importance in cases wherein for a determined wavelength the distinction between bar code and background is insufficient. It is possible in a manner not shown to switch between the laser sources, for instance it is possible to switch between the laser sources at a fixed
15 location during rotation of the mirror.

Fig. 3A and 3B show in top view and side view how a line, for instance e, is projected from laser source 41 via mirrors 46, 47, 44, 45 and 29 onto polygonal rotatable mirror 50, from where the line e is
20 written using mirrors 28 and 25. The radiation scattered by a bar code is received via the same optical path by a focussing mirror 51 and detected on detector 53 via fixed mirror 52.

Line c (fig. 4A, 4B) is written in similar
25 manner from rotating mirror 50 via mirrors 23 and 24.

A line such as h (fig. 5A, 5B) is written from mirror 50 via mirrors 22 and 25.

Fig. 6A, 6B shows a line such as q which is written from the housing part 3 from rotatable mirror 50
30 using fixed mirrors 33 and 31.

In similar manner fig. 7A shows a line such as m which is written from rotatable mirror 50 via mirror
36.

Fig. 8 shows the rotatable mirror 50 which is
35 preferably manufactured from plastic with vapour-deposited mirror surfaces and with which the diverse lines are written alternately per mirror surface 61, 62, 63, 64 from the lower window and the upper window.

In fig. 9 is shown an arrangement wherein four devices according to the present invention 1, 1', 1'', 1''' are placed in a compact arrangement whereby an internal tunnel 60 is formed, inside which an article is transported in and out as according to arrow A or there-
5 through, so that an article can be scanned from all sides.

The preferred embodiment described in fig. 1 and 2 further preferably comprises a drive motor 61 for driving the polygon, the output signal A of which is
10 connected to a means for dividing by two 62 since in this preferred embodiment a pulse is generated by motor 61 at each half-rotation, as indicated in fig. 11A in which a time period t_r is shown. Multiplication by the signal from
15 the means for dividing by two 62 (fig. 11B) results in the signal C as according to fig. 11B, which is fed to a microprocessor 63 which is connected to a so-called host computer 64. Sensor 53 detects the radiation and generates an analog signal which is converted in
20 converter part 65 into a digital decoding signal which is likewise fed to microprocessor 63. This latter further generates control signals to drive elements 66 and 67 for driving of lasers 41 and 42.

In a manner not shown, the quadrangular polygon
25 and the motor are both provided with a marking which are placed one above the other during assembly. The position of the polygon is hereby calibrated relative to the motor pulse as shown in fig. 11A.

A great number of options are thus possible for
30 ON/OFF switching of the two laser sources. In a first preferred embodiment the polygon is for instance switched alternately at each half-rotation so that, as the surfaces of the polygon have a differing position at each quarter-turn, two lines are written in each case by one
35 laser, one of these through the horizontal window and one through the vertical window. Thus ensured continuously to the best possible extent is that all pattern lines are present in the space to be scanned.

As noted earlier, laser sources 41 and 42 can have radiation with differing polarization direction, differing wavelengths and/or different focus points. In determined conditions one of the two laser sources will
5 hereby achieve a better score in recognition of a bar code or bar code half. It is also quite conceivable for a first bar code half to be detected by radiation from the first laser source while a second bar code half is scanned by the other laser source.

10 By now recording in the microprocessor which of the two laser sources achieves the best "score" in recognizing a bar code, the switching of the laser sources can be changed, for instance to a ratio of 1:3 or 1:5, so that the laser source with the highest score is
15 switched ON more often.

CLAIMS

1. Device for reading a code on an article, comprising:

- a housing provided with at least two windows for passage of radiation which are disposed at a relative mutual angle;
- radiation source means for transmitting radiation to the article, which radiation source means are arranged in the housing and comprise at least two separate radiation sources;
- a rotatable polygonal mirror for reflecting radiation coming from the radiation source means;
- a number of fixedly disposed mirrors for reflecting through the respective windows the radiation coming from the polygonal mirror; and
- detection means for detecting the radiation scattered by the code.

2. Device as claimed in claim 1, provided with control means for alternate switching on/off of one or both radiation sources.

3. Device as claimed in claim 1 or 2, wherein the operation of each of the laser sources is switched ON/OFF by means of a pulse from a drive motor for driving the polygonal mirror.

4. Device as claimed in any of the claims 1, 2 or 3, wherein subject to the number of correct scans using one of the two radiation sources, this radiation source is switched ON more often than the other.

5. Device as claimed in any of the claims 1-4, wherein each of the radiation sources is focussed at a different distance relative to the window.

6. Device as claimed in claim 5, wherein the difference in focus point amounts to about 7 cm.

7. Device as claimed in any of the claims 1-6, wherein the pattern of scan lines on the first window substantially corresponds with the pattern of scan lines on the second window.

5 8. Device as claimed in any of the claims 1-7, wherein the radiation sources each transmit radiation of a different wavelength.

 9. Device as claimed in claim 8, wherein the wavelength of the first radiation source amounts to
10 roughly 820 nm and that of the second radiation source to roughly 670 nm.

 10. Device as claimed in any of the claims 1-9, wherein the rotatable polygonal mirror is embodied such that scan lines are projected alternately through the
15 first and the second window.

 11. Device as claimed in any of the claims 1-10, wherein the first radiation source generates radiation with a first polarization direction while a second radiation source generates radiation with a
20 polarization direction differing from the first polarization direction, for instance rotated through 90° relative to the first direction.

 12. Device as claimed in any of the claims 1-11, wherein the housing comprises a number of injection
25 moulded components, two of which form in each case the housing part in which are arranged the fixed mirrors for a scan pattern as well as the window.

 13. Device as claimed in any of the claims 1-12, provided with a single detector and a single drive
30 motor for driving the mirror.

 14. Device as claimed in any of the claims 1-13, wherein the housing parts can be mutually fixed with one or more sliding members.

 15. Device comprising a number of devices as
35 claimed in one or more of the claims 1-14, which are placed relative to each other such that a tunnel space is created.

16. Device as claimed in claim 15, provided with a transporting member for transporting articles with codes in and out of the tunnel space.

17. Method for reading a code on an article
5 wherein a device as claimed in any of the foregoing claims is used.






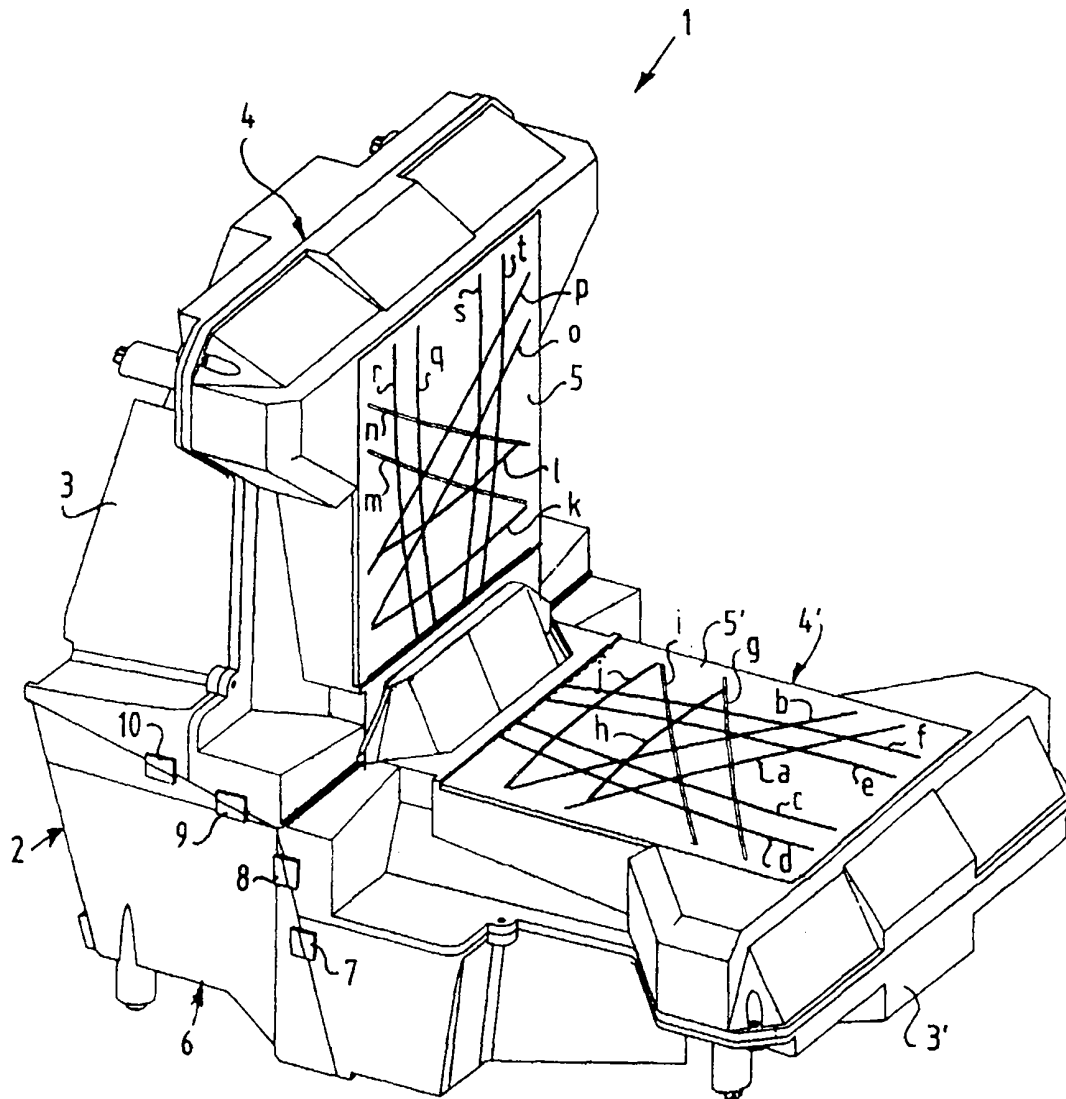


FIG. 1

2/11

FIG. 2

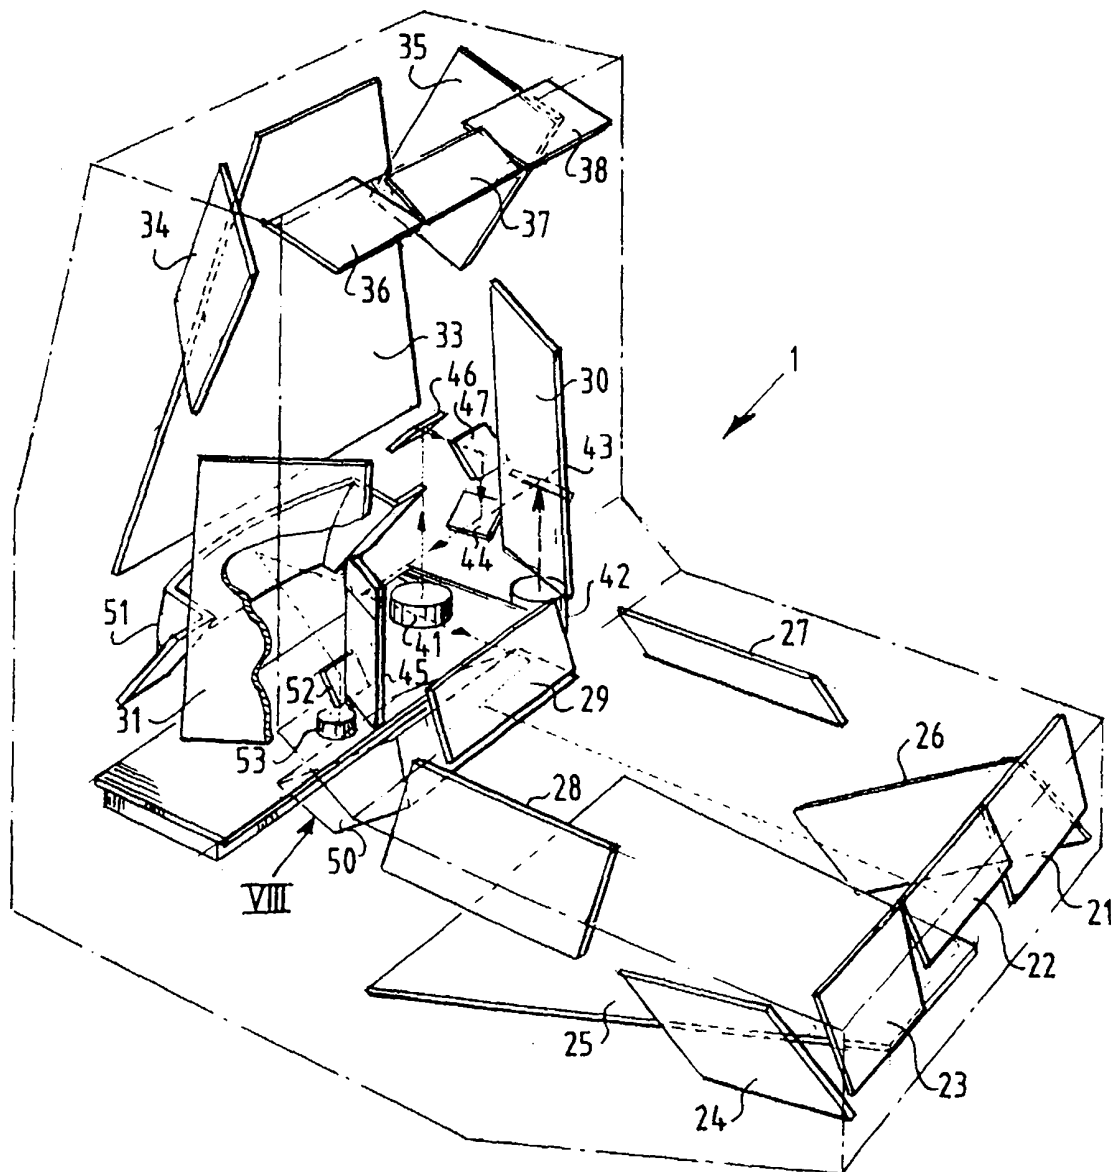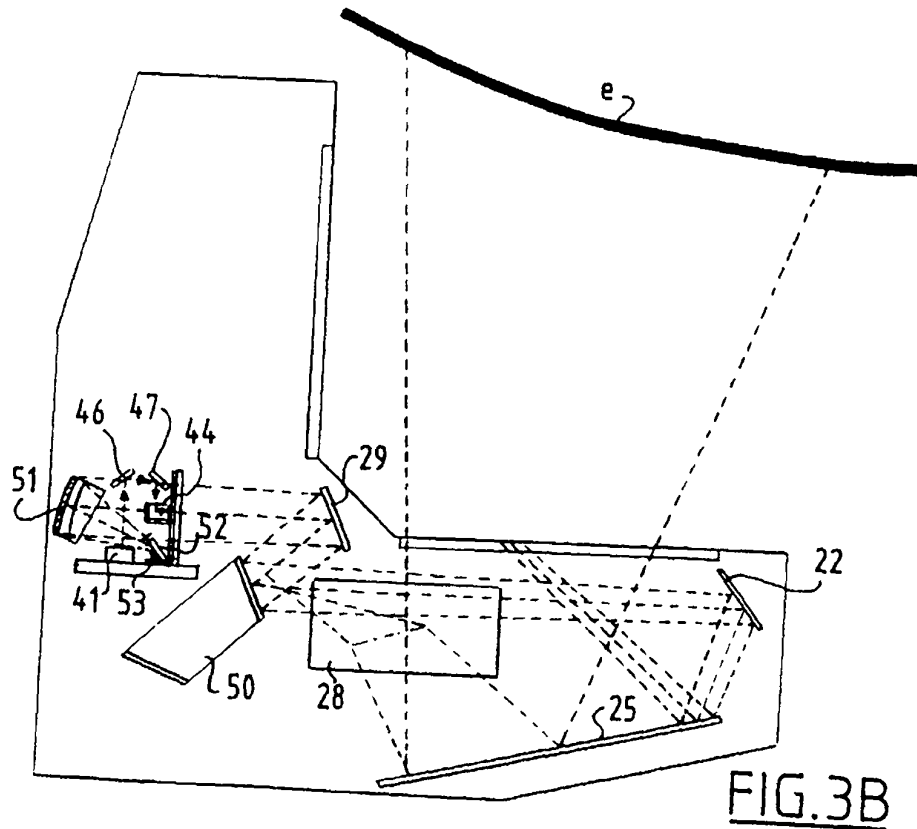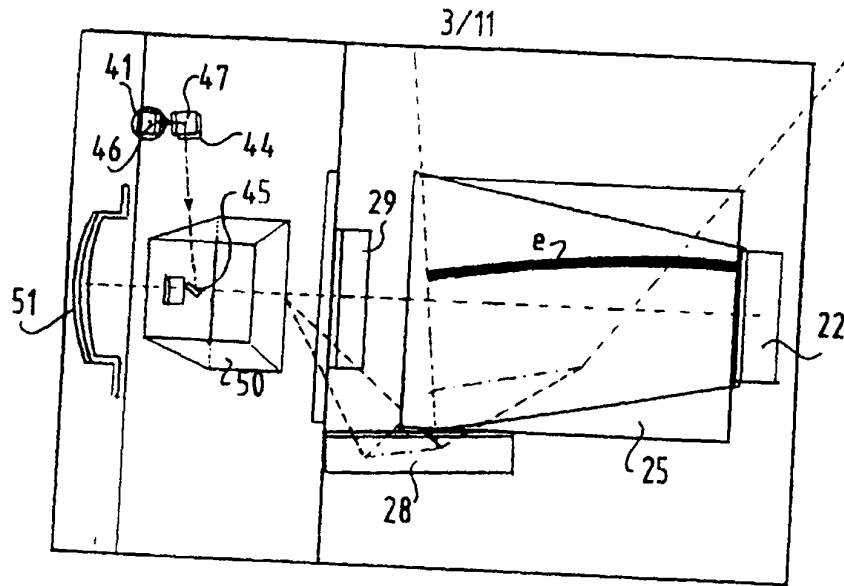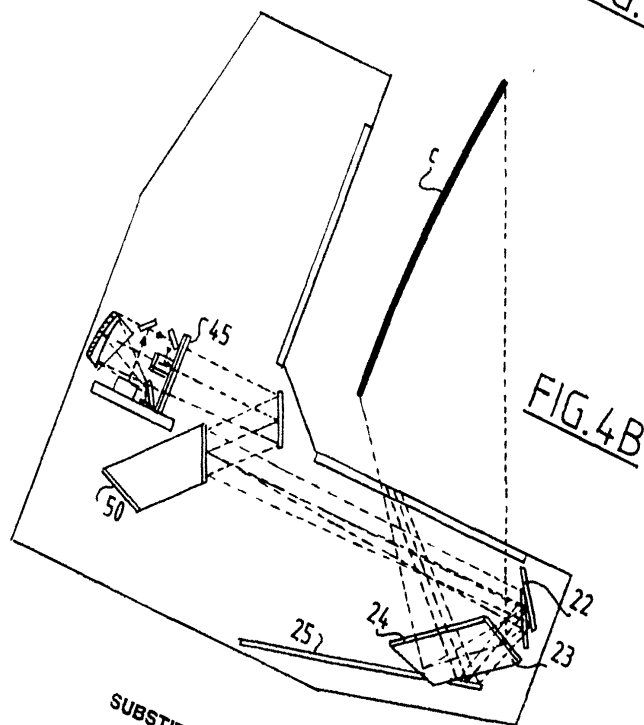

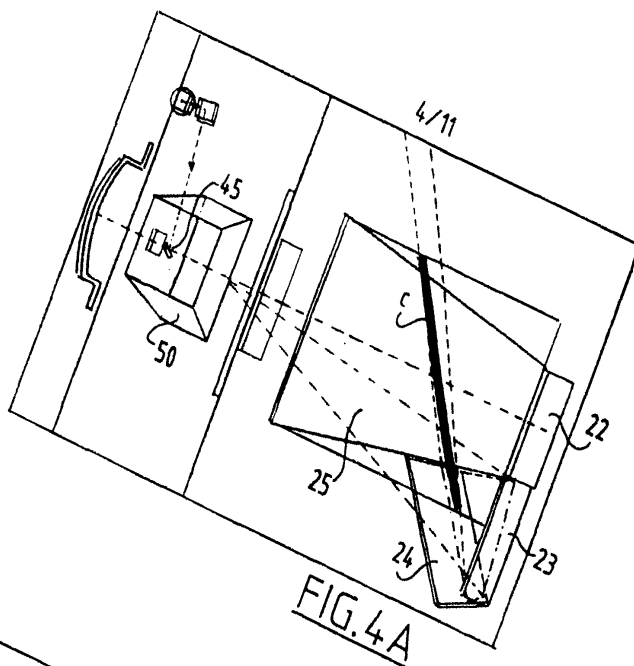

5/11

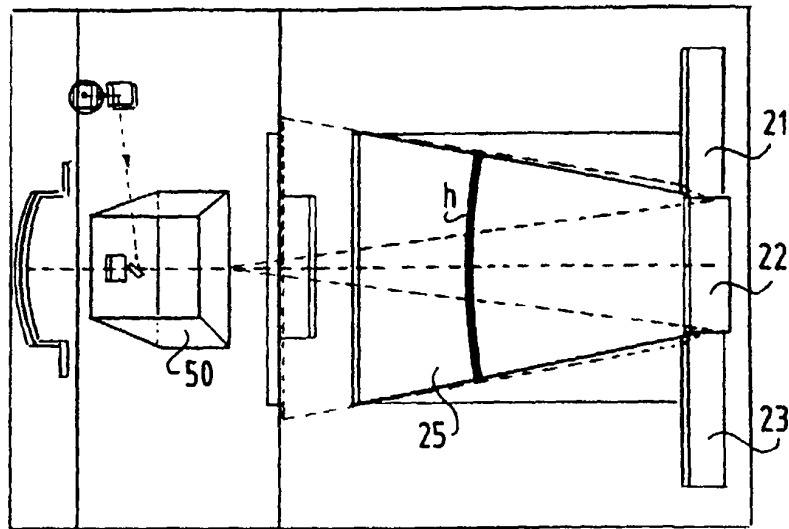


FIG. 5A

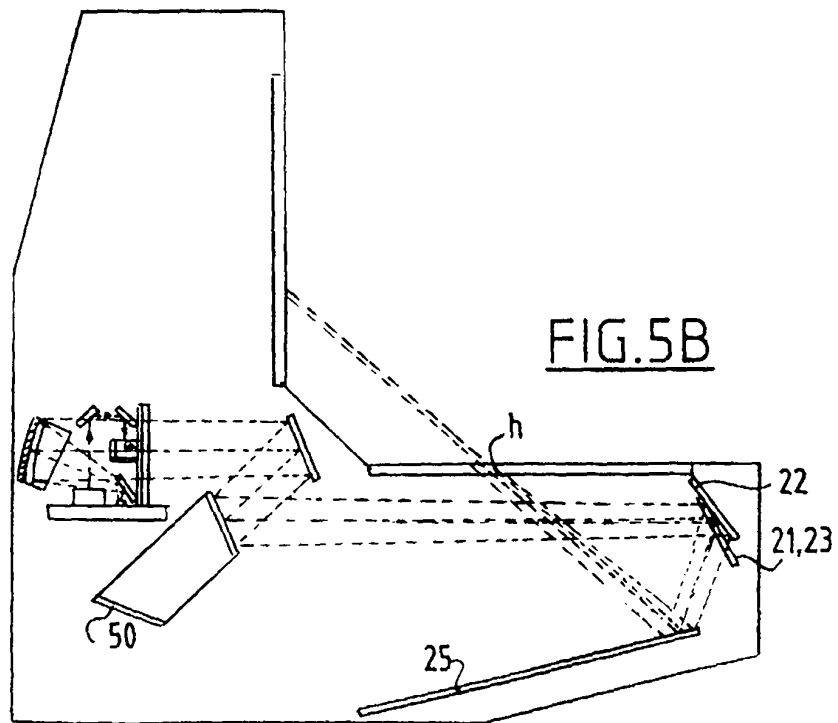
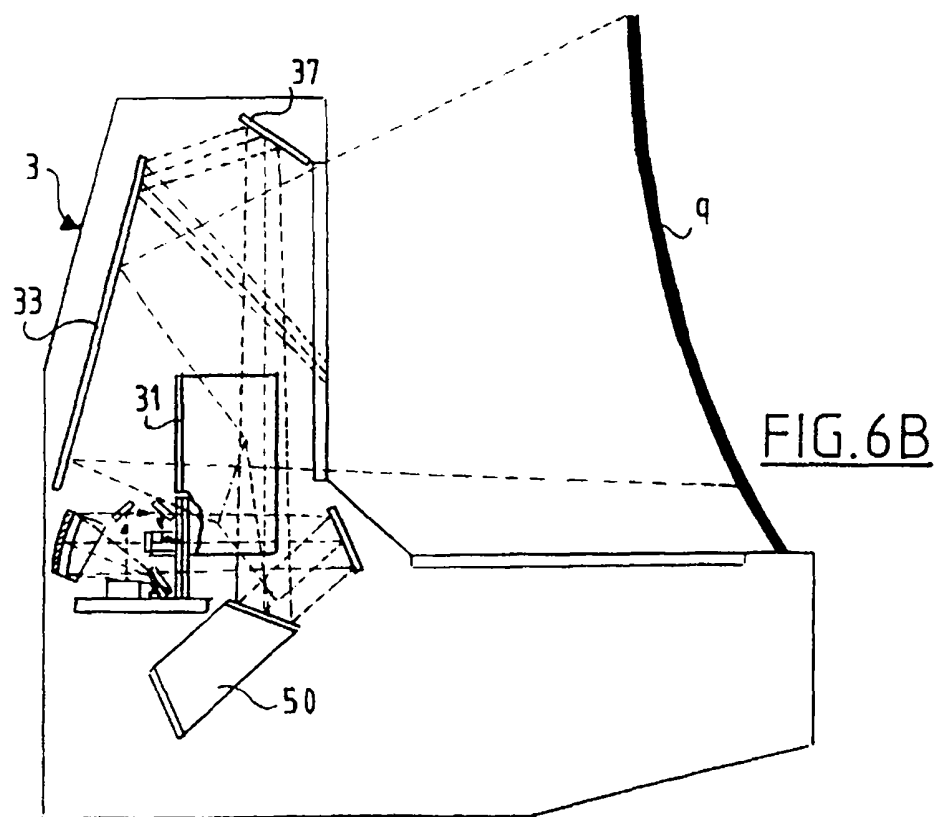
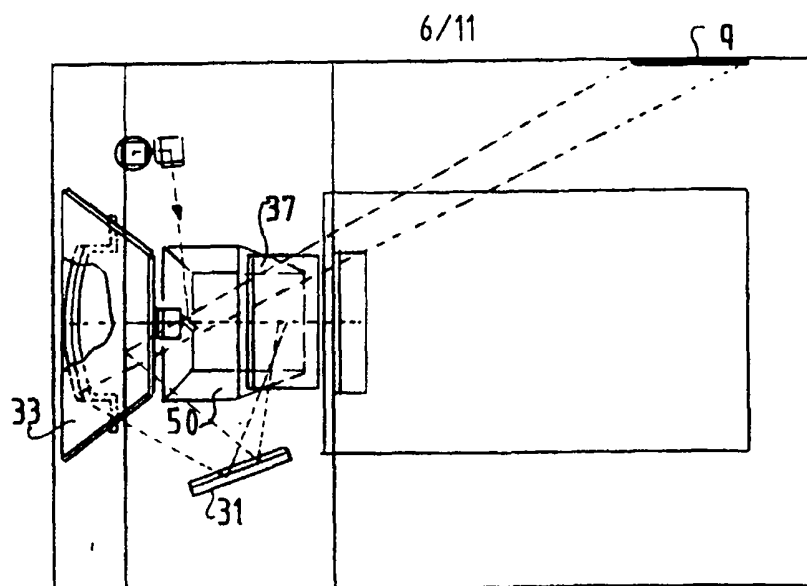


FIG. 5B



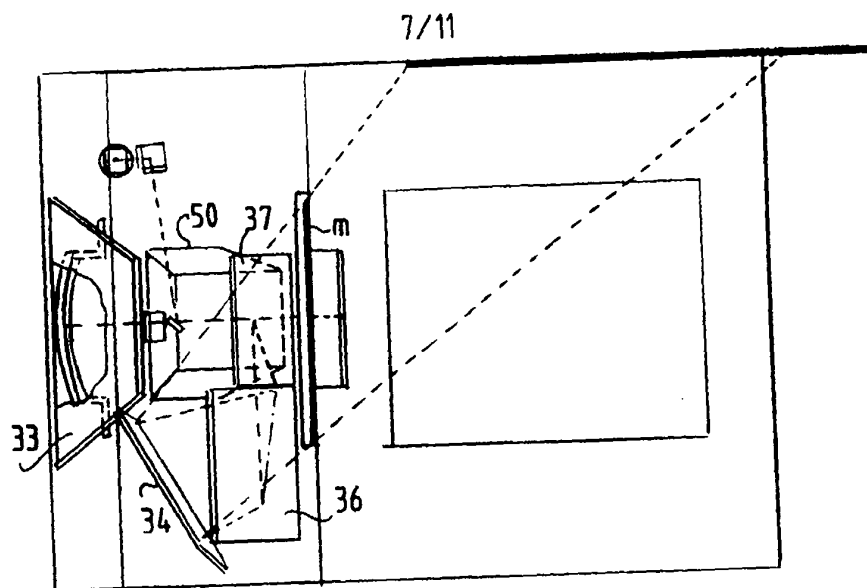


FIG. 7A

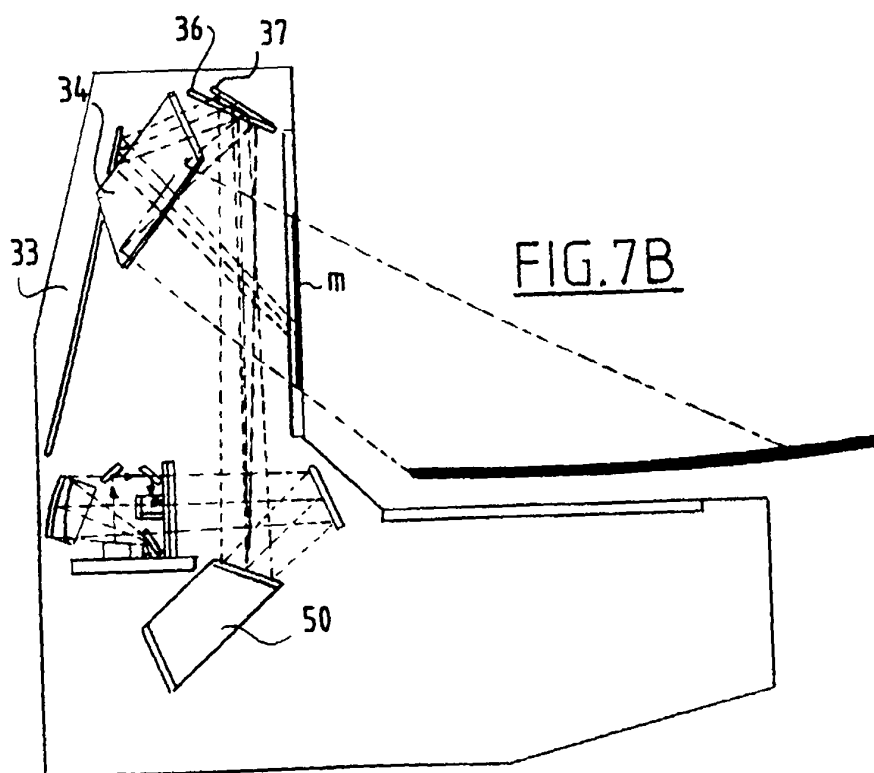


FIG. 7B

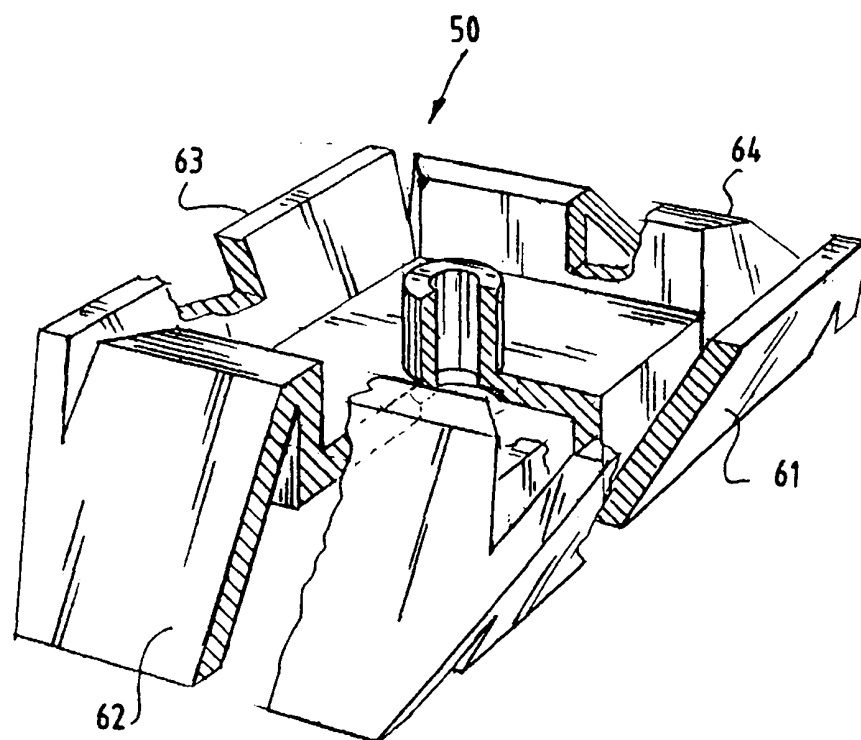


FIG. 8

9/11

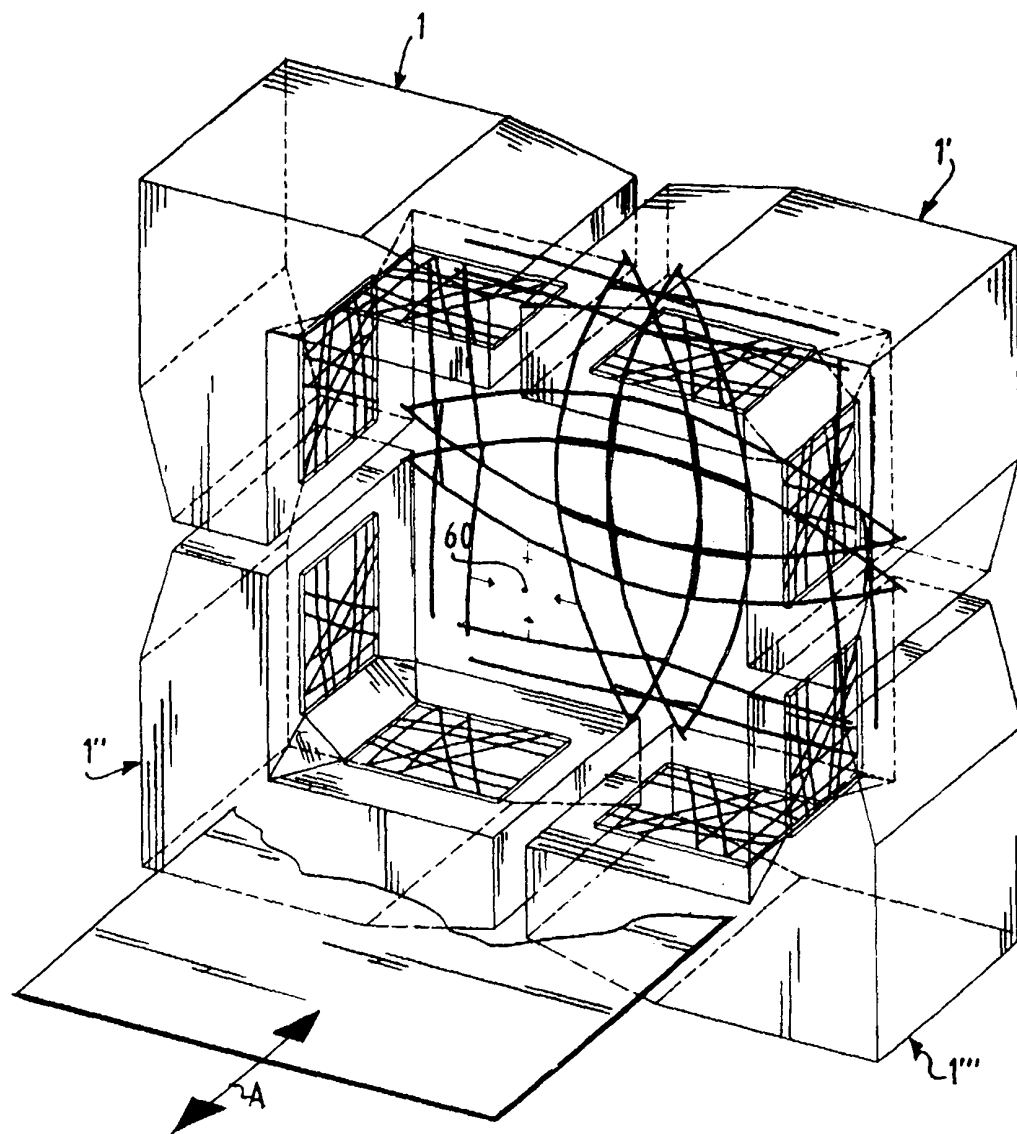


FIG. 9

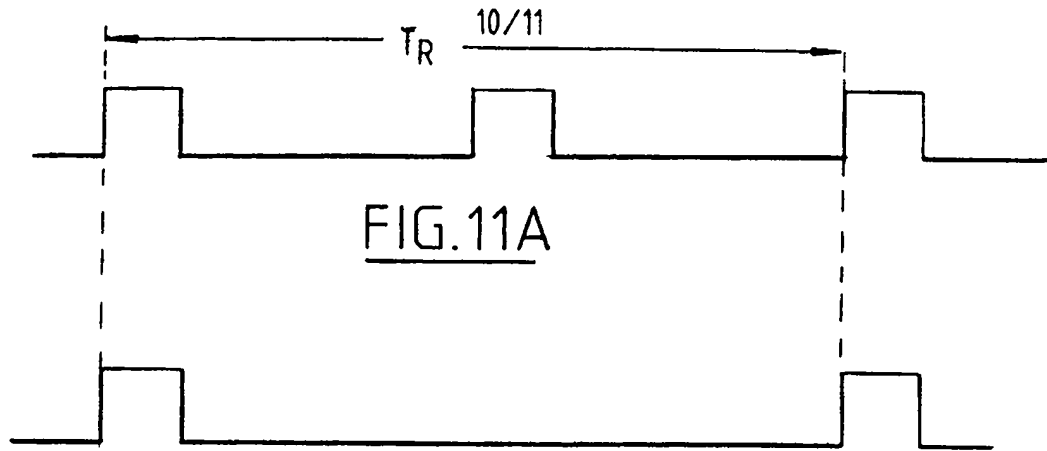


FIG.11A

FIG.11B

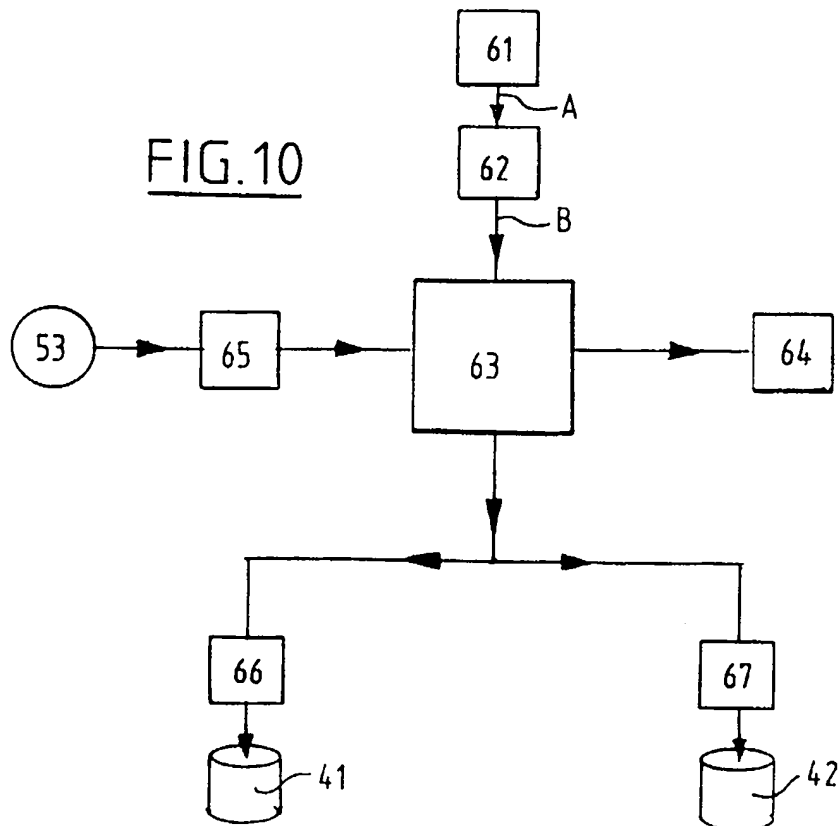


FIG.10

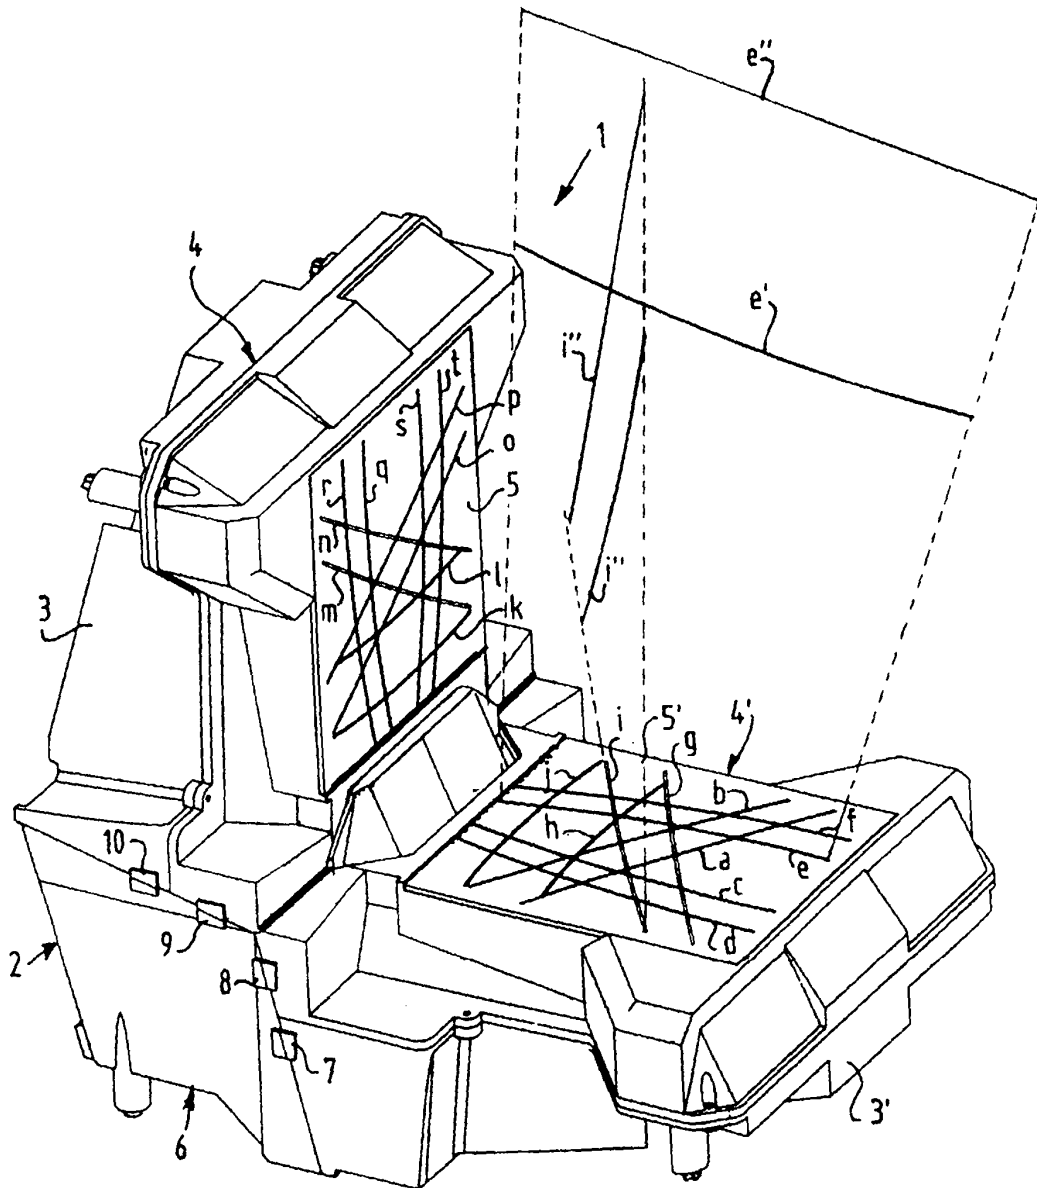


FIG.12